


# K-W45 STUECK IG IG RP-GEW

45° elbows, female-female, Rp thread acc. to ISO 7-1

**HANSA FLEX**

## Caratteristiche

|                         |                                 |
|-------------------------|---------------------------------|
| Pressione d'esercizio   | max. 20 bar                     |
| Temperatura d'esercizio | Max. 175 °C                     |
| Filettatura interna     | Rp-thread acc. ISO 7-1          |
| Materiale               | Stainless steel 1.4401 / 1.4408 |

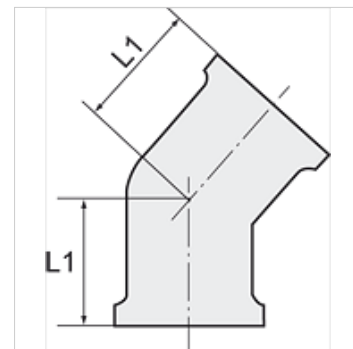

## Nota

Altri dati su richiesta.

## Articolo

| Denominazione  | Filetto | L1<br>(mm) |
|----------------|---------|------------|
| K- 07 40 10 42 | Rp 1/8  | 15,6       |
| K- 07 40 10 43 | Rp 1/4  | 15,9       |
| K- 07 40 10 44 | Rp 3/8  | 17,6       |
| K- 07 40 10 45 | Rp 1/2  | 19,2       |
| K- 07 40 10 46 | Rp 3/4  | 22,8       |
| K- 07 40 10 47 | Rp 1    | 26,7       |