



# K-T-STUECKE IG 1

Tees, female-female-female

**HANSA FLEX**

## Caratteristiche

|                         |                                 |
|-------------------------|---------------------------------|
| Pressione d'esercizio   | 60 bar                          |
| Temperatura d'esercizio | Max. 150 °C                     |
| Filettatura interna     | Parallel to DIN EN ISO 228-1    |
| Materiale               | Brass with a bare metal surface |

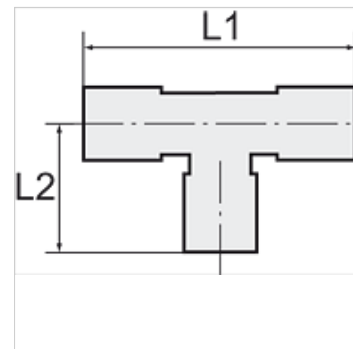

## Nota

Altri dati su richiesta.

## Articolo

| Denominazione  | Filetto | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|------------|------------|-------|
| K- 07 40 11 58 | G 1/8   | 42,0       | 21,0       | 10 mm |
| K- 07 40 11 59 | G 1/4   | 51,0       | 25,5       | 13 mm |
| K- 07 40 11 60 | G 3/8   | 56,0       | 28,0       | 17 mm |
| K- 07 40 11 61 | G 1/2   | 67,0       | 33,5       | 21 mm |
| K- 07 40 11 68 | G 3/4   | 73,0       | 36,5       | 25 mm |
| K- 07 40 11 69 | G 1     | 90,0       | 45,0       | 30 mm |