


# K-MUFFEN RUND

Sockets, round

**HANSA FLEX**

## Caratteristiche

|                     |                              |
|---------------------|------------------------------|
| Pressione di lavoro | Max. 20 bar                  |
| Filettatura interna | Parallel to DIN EN ISO 228-1 |
| Materiale           | Stainless steel 1.4408       |

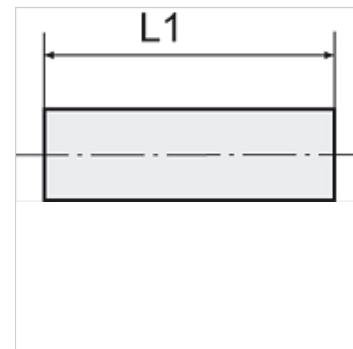

## Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.  
Altri dati su richiesta.

## Articolo

| Denominazione  | Filetto | L1<br>(mm) |
|----------------|---------|------------|
| K- 07 40 14 88 | G 1/8   | 25,0       |
| K- 07 40 14 89 | G 1/4   | 25,4       |
| K- 07 40 14 90 | G 3/8   | 30,0       |
| K- 07 40 14 91 | G 1/2   | 35,0       |
| K- 07 40 14 92 | G 3/4   | 38,6       |
| K- 07 40 14 93 | G 1     | 43,9       |
| K- 07 40 14 94 | G 1 1/4 | 50,1       |
| K- 07 40 14 95 | G 1 1/2 | 53,6       |
| K- 07 40 14 96 | G 2     | 63,0       |