


K-T-VB MS NI VALUE LINE

Union tees

HANSA FLEX

Caratteristiche

| | |
|-------------------------|--|
| Pressione d'esercizio | Max. 16 bar (at +20 °C) |
| Temperatura d'esercizio | -20 °C to +70 °C |
| Materiale | Ottone nichelato |
| Anello di compressione | Hostaform (black nickel-plated for Ø 10, 12) |
| O-ring | NBR, siliconefree |
| Pinza a trazione | Stainless steel AISI 316 |

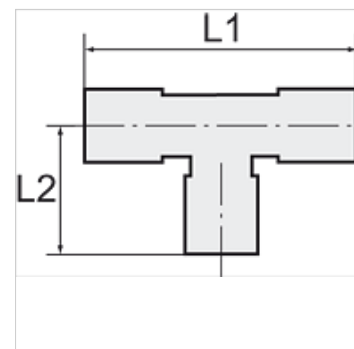

Nota

Altri dati su richiesta.

Descrizione

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Articolo

| Denominazione | per diametro esterno del tubo flessibile Ø mm | L1 (mm) | L2 (mm) |
|----------------|---|------------|------------|
| K- 07 40 29 52 | 4 mm | 17,5 | 17,5 |
| K- 07 40 29 53 | 6 mm | 19,5 | 19,5 |
| K- 07 40 29 54 | 8 mm | 23,0 | 23,0 |
| K- 07 40 29 55 | 10 mm | 25,0 | 25,0 |
| K- 07 40 29 56 | 12 mm | 27,0 | 27,0 |