


K-SDR DREH AG

Banjo elbows, swivel type, parallel male thread

HANSA FLEX

Caratteristiche

Pressione d'esercizio	Max. 16 bar (at +20 °C)
Temperatura d'esercizio	-20 °C to +70 °C
Materiale	Ottone nichelato
Anello di compressione	Hostaform (black nickel-plated for Ø 10, 12)
O-ring	NBR, siliconefree
Pinza a trazione	Stainless steel AISI 316

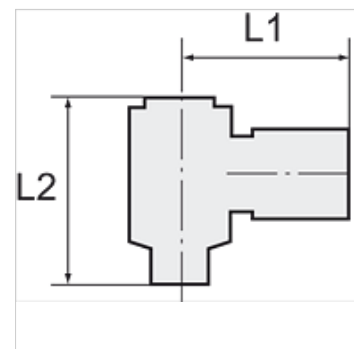

Nota

Altri dati su richiesta.

Descrizione

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)
K- 07 40 29 88	M 5	4 mm	18,5	17,0
K- 07 40 29 91	G 1/8	4 mm	21,0	25,0
K- 07 40 29 92	G 1/8	6 mm	23,5	25,0
K- 07 40 29 93	G 1/8	8 mm	24,5	25,0
K- 07 40 29 89	G 1/4	6 mm	24,5	29,3
K- 07 40 29 90	G 1/4	8 mm	26,0	29,3