


# K-W90 VERBINDER PP

Union elbows

**HANSA FLEX**

## Caratteristiche

|                         |                    |
|-------------------------|--------------------|
| Pressione di lavoro     | on request         |
| Temperatura d'esercizio | Max. +20 °C        |
| Materiale               | Polypropylene (PP) |
| Materiale di tenuta     | NBR                |

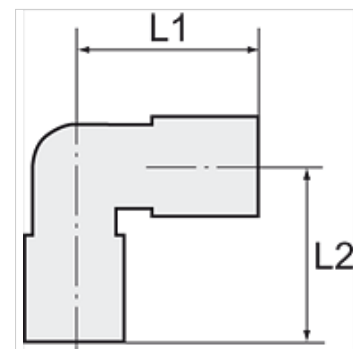

## Nota

Altri dati su richiesta.

## Descrizione

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Articolo

| Denominazione  | per diametro esterno del tubo flessibile Ø mm | L1<br>(mm) | L2<br>(mm) |
|----------------|---|------------|------------|
| K- 07 40 28 62 | 32 mm   | 99,7       | 99,7       |