


K-SDR AG

Banjo elbows, parallel male thread

HANSA FLEX

Caratteristiche

pressione d'esercizio max.	18 bar
tubi flessibili utilizzabili	PA, PE, PU
Materiale	Ottone nichelato

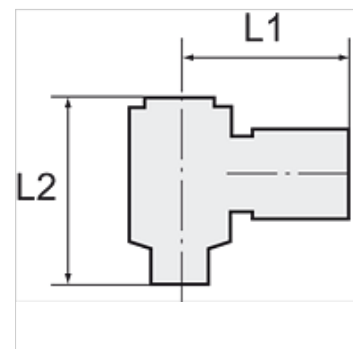

Nota

Altri dati su richiesta.

Articolo

Denominazione	Filetto	per flessibile	L1 (mm)	L2 (mm)	SW
K- 07 40 33 99	M 5	5 mm / 3 mm	17,0	17,5	8 mm
K- 07 40 34 00	M 5	6 mm / 4 mm	18,0	17,5	8 mm
K- 07 40 34 04	G 1/8	6 mm / 4 mm	24,0	28,0	14 mm
K- 07 40 34 05	G 1/8	8 mm / 6 mm	24,0	28,0	14 mm
K- 07 40 34 02	G 1/4	6 mm / 4 mm	26,0	29,5	17 mm
K- 07 40 34 03	G 1/4	8 mm / 6 mm	26,0	29,5	17 mm
K- 07 40 34 01	G 1/4	10 mm / 8 mm	27,5	33,0	17 mm
K- 07 40 34 07	G 3/8	8 mm / 6 mm	27,5	31,5	22 mm
K- 07 40 34 06	G 3/8	10 mm / 8 mm	28,5	31,5	22 mm