

K-VLST 2 X IG MS NI

Extensions, 2 x female thread, parallel - nickel-plated brass

Caratteristiche

Temperatura d'esercizio	Max. 150 °C
Pressione	Max. 60 bar
Materiale	Ottone nichelato



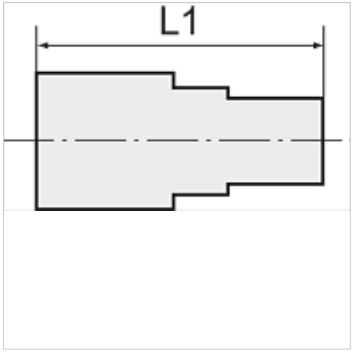

Nota

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Altri dati su richiesta.

Descrizione

Suitable for air, water, oil, steam, etc.

Informazioni supplementari

Further types and dimensions on request.

Articolo

Denominazione	Filettatura 1	Filettatura 2	L1 (mm)	SW
K- 07 40 39 09	M 5	G 1/8	13,5	14 mm
K- 07 40 39 10	G 1/8	G 1/4	21,5	17 mm
K- 07 40 39 11	G 1/8	G 3/8	23,5	22 mm
K- 07 40 39 12	G 1/4	G 3/8	25,5	22 mm
K- 07 40 39 13	G 1/4	G 1/2	28,5	24 mm
K- 07 40 39 14	G 3/8	G 1/2	29,5	24 mm
K- 07 40 39 15	G 1/2	G 3/4	30,0	32 mm
K- 07 40 43 91	G 1/2	G 1/8	24,0	24 mm
K- 07 40 43 92	G 1	G 3/4	25,0	38 mm

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.