


### Caratteristiche

Pressione d'esercizio 0 - 10 bar

Campo della temperatura: -10 °C to +60 °C

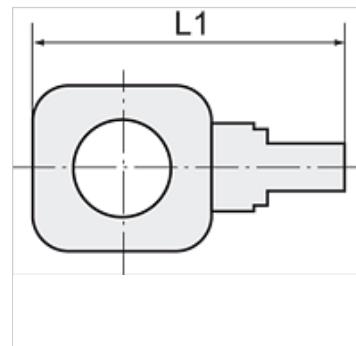

### Nota

Altri dati su richiesta.

### Articolo

Denominazione	Filetto	per flessibile	L1 (mm)
K-07 40 33 34	for G 1/8	6 mm / 4 mm	31,0
K-07 40 33 35	for G 1/8	8 mm / 6 mm	33,0
K-07 40 33 36	for G 1/4	6 mm / 4 mm	35,0
K-07 40 33 37	for G 1/4	8 mm / 6 mm	36,5