

K-T-VERSCHR DREH ALU POM BLAU



Branch tees with aluminium banjo bolt, swivel type

HANSA FLEX

Caratteristiche

Pressione d'esercizio 0 - 10 bar

Campo della temperatura: -10 °C to +60 °C

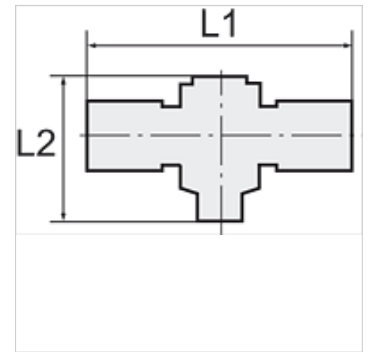

Nota

Altri dati su richiesta.

Articolo

Denominazione	Filetto	per flessibile	L1 (mm)	L2 (mm)
K- 07 40 33 38	G 1/8	6 mm / 4 mm	47,0	27,0
K- 07 40 33 39	G 1/8	8 mm / 6 mm	49,0	27,0
K- 07 40 33 40	G 1/4	6 mm / 4 mm	51,0	29,0
K- 07 40 33 41	G 1/4	8 mm / 6 mm	53,0	29,0