

K-W90 VERSCHR DREH HS ALU POM BLAU


Union elbows with aluminium banjo bolt, swivel type

HANSA FLEX

Caratteristiche

Pressione d'esercizio 0 - 10 bar

Campo della temperatura: -10 °C to +60 °C

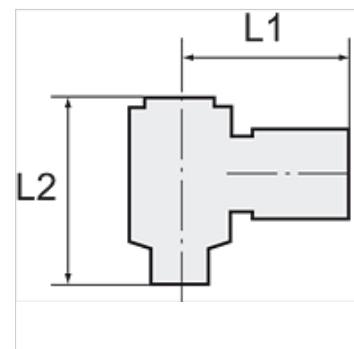

Nota

Altri dati su richiesta.

Articolo

Denominazione	Filetto	per flessibile	L1 (mm)	L2 (mm)
K- 07 40 33 24	G 1/8	6 mm / 4 mm	23,0	27,0
K- 07 40 33 25	G 1/8	8 mm / 6 mm	25,0	27,0
K- 07 40 33 26	G 1/4	6 mm / 4 mm	25,0	29,0
K- 07 40 33 27	G 1/4	8 mm / 6 mm	26,5	29,0