
# K-VT 2-FACH MS NI

Distributors, 2 outlets, nickel-plated brass

## Caratteristiche

| | |
|---|---|
| **Pressione d'esercizio** | max. 10 bar |
| **Materiale** | Ottone nichelato |



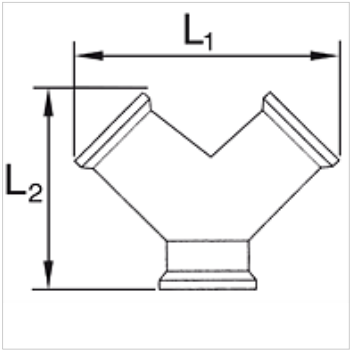


## Nota

Altri dati su richiesta.

## Articolo

| Denominazione | Filetto | Outlets | L1 (mm) | L2 (mm) |
|---|---|---|---|---|
| **K- 07 40 40 14** | G 1/8 male | 2 x female | 29,0 | 32,0 |
| **K- 07 40 40 15** | G 1/4 male | 2 x female | 36,0 | 38,0 |
| **K- 07 40 45 63** | G 3/8 male | 2 x female | 41,0 | 42,5 |
| **K- 07 40 45 62** | G 1/2 male | 2 x female | 53,0 | 53,0 |
| **K- 07 40 45 66** | G 1/8 female | 2 x female | 29,0 | 26,5 |
| **K- 07 40 40 82** | G 1/4 female | 2 x female | 36,0 | 32,0 |
| **K- 07 40 40 85** | G 3/8 female | 2 x female | 41,0 | 37,0 |
| **K- 07 40 40 86** | G 1/2 female | 2 x female | 53,0 | 45,0 |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*