



# K-T VERTEILER MS ALU

Tee distributors

**HANSA FLEX**

## Caratteristiche

Pressione d'esercizio max. 10 bar

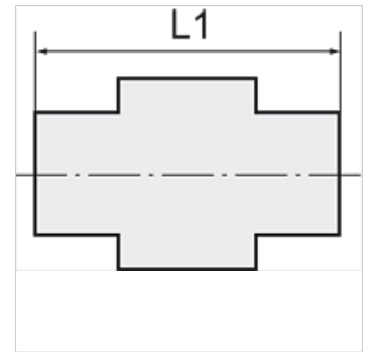

## Nota

Altri dati su richiesta.

## Articolo

Denominazione	Filetto	L1 (mm)	SW	Materiale
K- 07 40 38 68	M 5	14,0	8 mm	Ottone
K- 07 40 38 69	G 1/8	23,0	16 mm	Ottone
K- 07 40 38 70	G 1/4	30,0	22 mm	Ottone
K- 07 40 38 71	G 3/8	40,0	25 mm	Alluminio
K- 07 40 38 72	G 1/2	50,0	30 mm	Alluminio