


K-FI REGL H ABLV VA

Filter regulators

HANSA FLEX

Caratteristiche

Pressione d'ingresso	Max. 30 bar
Temperatura del fluido	max. 130 °C
Temperatura ambiente	Max. 60 °C
Portata	2500 l/min
Amplezza dei pori dell'elemento filtrante	50 µm
Materiale di tenuta	FKM
Membrana	PTFE on NBR base
Materiale	stainless steel 1.4404 (AISI 316L)
Drain valve	Manual drain valve
Misurazione del valore della portata	At P1 = 10 bar, P2 = 5 bar and pressure drop $\Delta p \leq 1$ bar

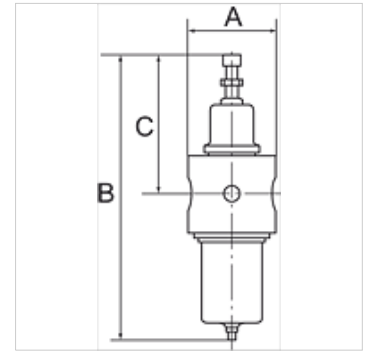

Nota

Altri dati su richiesta.

Descrizione

Stainless steel filter regulators with self-relieving (not for liquid media) containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

Avvertenza per l'ordinazione

With filter element 5 µm available on request. Without self-relieving design (for liquids) available on request. With semi- or fully automatic drain valve on request. With NPT threads available on request.

Articolo

Denominazione	Filetto	Intervallo di regolazione	A (mm)	B	C (mm)
K- 07 25 06 52	G 1/4	1.0 - 15.0 bar	65,0	250,0 mm	125,0
K- 07 25 06 51	G 1/2	1.0 - 15.0 bar	80,0	260,0 mm	127,0

Parti di ricambio

K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts