


K-WTEH 3-TLG PC SCH MANO HANSA

Service units, 3-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Caratteristiche

| | |
|--------------------------------------|---|
| Pressione d'ingresso | 1.5 - 16 bar |
| Pressione d'uscita | 0.5 - 8 bar |
| Campo della temperatura: | -10 °C to +50 °C |
| Mezzi | Aria compressa |
| Finezza del filtro | 5,00 µm |
| Filettatura attacco | Material: Die-cast zinc |
| Serbatoio | Polycarbonate (with bayonet lock) |
| Elemento filtrante | Cellpor (PE) |
| Alloggiamento | Material: Grivory® (PA 66) |
| Membrana | NBR |
| Cestello di protezione | Polyamide |
| Contagocce | PA |
| Consumo proprio d'aria | Max. 1.5 l/min (depending on secondary pressure) |
| Misurazione del valore della portata | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

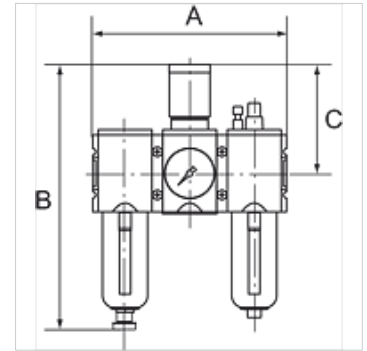

Nota

Altri dati su richiesta.

Descrizione

Two or three-piece service units with excellent flow rates in modern design.
Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Avvertenza per l'ordinazione

The price does not include a key lock. Please order separately.

Articolo

| Denominazione | Filetto | Portata (L/min) | A (mm) | B | C (mm) | Scarico della condensa |
|----------------|---------|-----------------|--------|----------|--------|------------------------|
| K- 07 25 14 37 | G 1/4 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 38 | G 3/8 | 1500 | 156,0 | 225,0 mm | 95,5 | Semi |
| K- 07 25 14 39 | G 3/8 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 40 | G 1/2 | 3500 | 189,0 | 257,0 mm | 110,0 | Semi |
| K- 07 25 14 41 | G 3/4 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 42 | G 1 | 12000 | 255,0 | 329,0 mm | 137,0 | Semi |
| K- 07 25 14 43 | G 1/4 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 44 | G 3/8 | 1500 | 156,0 | 243,0 mm | 95,5 | Auto |
| K- 07 25 14 45 | G 3/8 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 46 | G 1/2 | 3500 | 189,0 | 274,0 mm | 110,0 | Auto |
| K- 07 25 14 47 | G 3/4 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |
| K- 07 25 14 48 | G 1 | 12000 | 255,0 | 343,0 mm | 137,0 | Auto |

Accessori

K-STECKSCHLOSS Key lock

Parti di ricambio

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-FILTERELEMENT | Filter element |
| K-TROPFAUFSATZ HANSA | Drip attachment HANSA |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA |
| K-DICHTSATZ HANSA | Set of seals HANSA |