


# K-FI PC-BEHÄLTER SCHUTZK MULTIFIX

Filters with polycarbonate bowl and bowl guard

**HANSA FLEX**

## Caratteristiche

|   |  |
|---|--|
| Pressione d'ingresso                      | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatura del fluido                    | max. 60 °C   |
| Temperatura ambiente                      | Max. 60 °C   |
| Amplezza dei pori dell'elemento filtrante | 5 µm (BG 1 / BG 2), 40 µm (BG 3)                           |
| Alloggiamento                             | Die-cast zinc, Aluminium for G 1 variant                   |
| Drain valve                               | Semi-automatic   |
| Misurazione del valore della portata      | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar         |

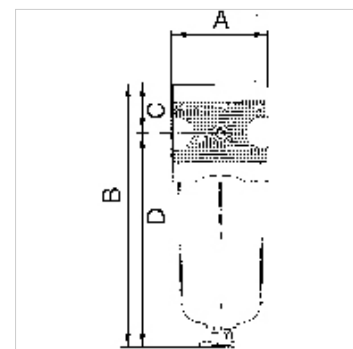

## Nota

Altri dati su richiesta.

## Descrizione

Centrifugal separators with a sintered filter element.

## Articolo

| Denominazione  | Filetto | Portata (L/min) | A (mm) | B (mm)   | C (mm) | D (mm) | DN | Dimensioni strutturali |
|----------------|---------|-----------------|--------|----------|--------|--------|----|------------------------|
| K- 07 25 00 48 | G 1/4   | 2100            | 47,8   | 152,1 mm | 27,0   | 125,1  | 6  | 1                      |
| K- 07 25 00 51 | G 3/8   | 2100            | 47,8   | 152,1 mm | 27,0   | 125,1  | 10 | 1                      |
| K- 07 25 00 54 | G 1/2   | 4000            | 68,8   | 181,8 mm | 34,5   | 147,3  | 15 | 2                      |
| K- 07 25 00 57 | G 3/4   | 4000            | 68,8   | 181,8 mm | 34,5   | 147,3  | 20 | 2                      |
| K- 07 25 00 60 | G 1     | 8000            | 100,0  | 305,8 mm | 52,0   | 253,8  | 25 | 3                      |

## Parti di ricambio

|                                 |                           |
|---------------------------------|---------------------------|
| K-HALTERBAUSATZ MULTIFIX        | Holder                    |
| K-KOPPELPAKET MEHR              | Coupling packet           |
| K-KOPPELPAKET SCHMA             | Coupling packet           |
| K-METALLBEHÄLTER OELER MULTIFIX | Metal tank oiler          |
| K-PC-BEHÄLTER FILTER MULTIFIX   | Polycarbonate tank filter |
| K-SCHUTZKORB G                  | Protective cage           |
| K-FILTERELEMENT                 | Filter element            |
| K-AUTOMAT ABLASSVENTIL          | Automatic drain valve     |