


K-NEBELOEL METALLBEHAE S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA FLEX

Caratteristiche

Pressione d'ingresso	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temperatura del fluido	max. 60 °C
Temperatura ambiente	Max. 60 °C
Materiale di tenuta	NBR
Alloggiamento	Die-cast zinc, Aluminium for G 1 variant
Contagocce	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Manual
Tipo di olio	CL 32 acc. to DIN 51517 - ISO VG 32
Misurazione del valore della portata	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

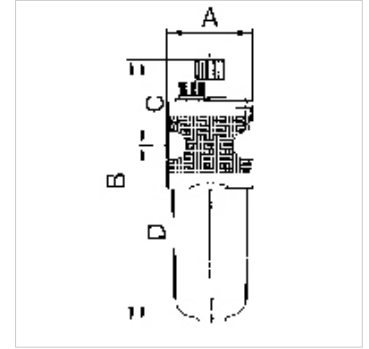

Nota

Altri dati su richiesta.

Descrizione

Proportional lubricators, oil can be filled under pressure.

Articolo

Denominazione	Filetto	Portata (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Dimensioni strutturali
K- 07 25 00 92	G 1/4	1900	47,8	181,3 mm	71,3	110,0	6	1
K- 07 25 00 95	G 3/8	1900	47,8	181,3 mm	71,3	110,0	10	1
K- 07 25 00 98	G 1/2	5000	68,8	213,0 mm	79,3	133,7	15	2
K- 07 25 01 01	G 3/4	5000	68,8	213,0 mm	79,3	133,7	20	2
K- 07 25 01 04	G 1	18000	100,0	322,9 mm	82,7	240,2	25	3

Parti di ricambio

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAE LTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal