K-WTEH 3-TLG MET SICH TROPF MULTIFI


Service units, 3-piece with metal bowl and sight glass, metal sight dome

HANSA FLEX

Caratteristiche

Pressione d'ingresso	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Temperatura del fluido	max. 60 °C
Temperatura ambiente	Max. 60 °C
Ampiezza dei pori dell'elemento filtrante	5 µm (BG 1 / BG 2), 40 µm (BG 3)
Materiale di tenuta	NBR
Calotta elastica	POM-brass
Alloggiamento	Die-cast zinc, Aluminium for G 1 variant
Contagocce	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Semi-automatic
Misurazione del valore della portata	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar



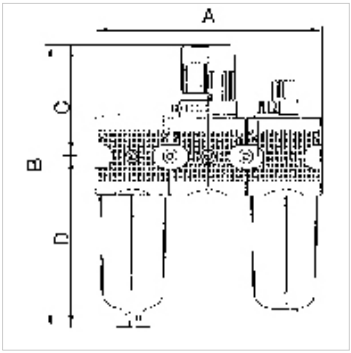

Nota

Altri dati su richiesta.

Descrizione

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

Avvertenza per l'ordinazione

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Informazioni supplementari

1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar.

Articolo

Denominazione	Filetto	Intervallo di regolazione	Portata (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Dimensioni strutturali
K- 07 25 01 11	G 1/4	0.5 - 10 bar	1100	138,0	196,0 mm	67,0	129,0	6	1
K- 07 25 01 14	G 3/8	0.5 - 10 bar	1100	138,0	196,0 mm	67,0	129,0	10	1
K- 07 25 01 17	G 1/2	0.5 - 10 bar	3000	202,0	248,0 mm	97,0	151,0	15	2
K- 07 25 01 20	G 3/4	0.5 - 10 bar	3000	202,0	248,0 mm	97,0	151,0	20	2
K- 07 25 01 23	G 1	0.5 - 10 bar	11300	300,0	385,0 mm	128,0	257,0	25	3

Parti di ricambio

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-VERSCHLEI-SATZ	Set of wearing parts

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.