


K-WTEH 3-TLG MET SICH TROPF MULTIFI

Service units, 3-piece with metal bowl and sight glass, metal sight dome

HANSA FLEX

Caratteristiche

| | |
|---|--|
| Pressione d'ingresso | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatura del fluido | max. 60 °C |
| Temperatura ambiente | Max. 60 °C |
| Ampiezza dei pori dell'elemento filtrante | 5 µm (BG 1 / BG 2), 40 µm (BG 3) |
| Materiale di tenuta | NBR |
| Calotta elastica | POM-brass |
| Alloggiamento | Die-cast zinc, Aluminium for G 1 variant |
| Contagocce | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Drain valve | Semi-automatic |
| Misurazione del valore della portata | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

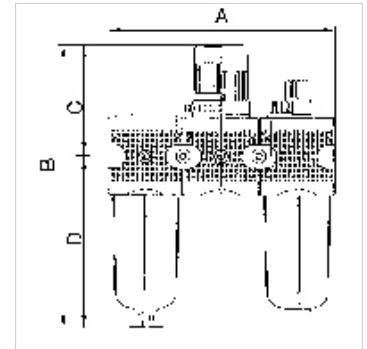

Nota

Altri dati su richiesta.

Descrizione

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

Avvertenza per l'ordinazione

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Informazioni supplementari

1500 l/min: P1: 10 bar, P2: 7 bar, $\Delta p \leq 0.1$ bar.

Articolo

| Denominazione | Filetto | Intervallo di regolazione | Portata (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Dimensioni strutturali |
|----------------|---------|---------------------------|-----------------|--------|----------|--------|--------|----|------------------------|
| K- 07 25 01 11 | G 1/4 | 0.5 - 10 bar | 1100 | 138,0 | 196,0 mm | 67,0 | 129,0 | 6 | 1 |
| K- 07 25 01 14 | G 3/8 | 0.5 - 10 bar | 1100 | 138,0 | 196,0 mm | 67,0 | 129,0 | 10 | 1 |
| K- 07 25 01 17 | G 1/2 | 0.5 - 10 bar | 3000 | 202,0 | 248,0 mm | 97,0 | 151,0 | 15 | 2 |
| K- 07 25 01 20 | G 3/4 | 0.5 - 10 bar | 3000 | 202,0 | 248,0 mm | 97,0 | 151,0 | 20 | 2 |
| K- 07 25 01 23 | G 1 | 0.5 - 10 bar | 11300 | 300,0 | 385,0 mm | 128,0 | 257,0 | 25 | 3 |

Parti di ricambio

| | |
|----------------------------------|-------------------------------|
| K-HALTERBAUSATZ | Holder |
| K-SCHALTAFELMUTTER | Nut |
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-SCHUTZKORB G | Protective cage |
| K-TROPFAUFSATZ POLYCARBO 1 | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |
| K-FILTERELEMENT | Filter element |
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-VERSCHLEI-SATZ | Set of wearing parts |