



# K-ANFAV VARIOBLOC

Manifolds

**HANSA FLEX**

## Caratteristiche

|                                      |  |
|--------------------------------------|--|
| Pressione d'esercizio                | 2 - 25 bar   |
| Misurazione del valore della portata | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

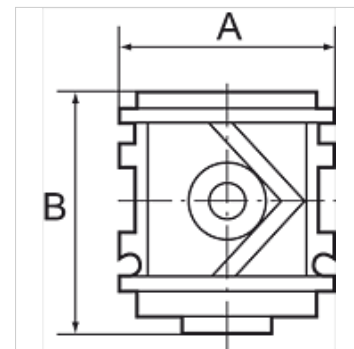

## Nota

Altri dati su richiesta.

## Descrizione

For slow pressure build-up in pneumatic systems, e.g. after an emergency stop. The valve opens to full flow at approximately 60% of the set operating pressure. The filling time can be set by turning the adjusting screw. Used in combination with multi-piece service units.

## Articolo

| Denominazione  | Filetto | Portata (L/min) | A (mm) | B       | Pressione d'esercizio in bar: |
|----------------|---------|-----------------|--------|---------|-------------------------------|
| K- 07 25 11 84 | G 1/4   | 1200            | 48,0   | 54,0 mm | 2 - 25 bar                    |
| K- 07 25 11 85 | G 3/8   | 1400            | 48,0   | 54,0 mm | 2 - 25 bar                    |
| K- 07 25 11 86 | G 1/2   | 3800            | 70,0   | 72,0 mm | 2 - 25 bar                    |
| K- 07 25 11 87 | G 3/4   | 4200            | 70,0   | 72,0 mm | 2 - 25 bar                    |
| K- 07 25 11 88 | G 1     | 4200            | 124,0  | 72,0 mm | 2 - 25 bar                    |