


K-FI REGL METALLBEHAE S MANO VARIOB

Filter regulators with metal bowl, incl. sight glass and pressure gauge

HANSA FLEX

Caratteristiche

| | |
|--|---|
| Pressione d'ingresso | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatura del fluido | max. 50 °C |
| Temperatura ambiente | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Ampiezza dei pori dell'elemento filtrante | 40 µm |
| Materiale di tenuta | NBR |
| Calotta elastica | POM |
| Alloggiamento | Die-cast zinc |
| Membrana | NBR |
| Drain valve | Manual |
| Misurazione del valore della portata | At P1 = 10 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |

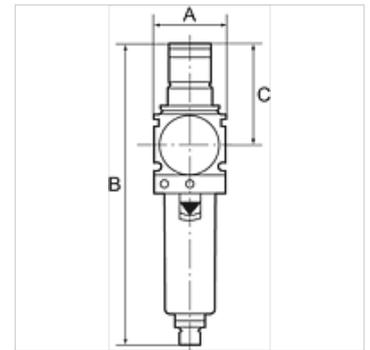

Nota

Altri dati su richiesta.

Descrizione

Reversible diaphragm pressure regulators, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator. The pressure setting can be locked by pushing the knob down. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

Avvertenza per l'ordinazione

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Informazioni supplementari

Filter regulators are also available with bowl guard or metal bowl. Filter regulators are also available in lockable version. Please ask for more information.

Articolo

| Denominazione | Filetto | Intervallo di regolazione | Portata (L/min) | A (mm) | B | C (mm) |
|-----------------------|---------|---------------------------|-----------------|--------|----------|--------|
| K- 07 25 06 86 | G 1/4 | 0.5 - 10 bar | 2000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 06 88 | G 3/8 | 0.5 - 10 bar | 3000 | 48,0 | 203,0 mm | 68,0 |
| K- 07 25 06 90 | G 1/2 | 0.5 - 10 bar | 5500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 06 92 | G 3/4 | 0.5 - 10 bar | 6500 | 70,0 | 273,0 mm | 98,0 |
| K- 07 25 06 94 | G 1 | 0.5 - 10 bar | 6500 | 124,0 | 273,0 mm | 98,0 |

Parti di ricambio

| | |
|---|--|
| K-VERSCHLEI-SATZ VARIOBLOC | Set of wearing parts |
| K-ERSATZBEHAELTER VARIOBLOC POLY | Spare tank Polycarbonat |
| K-FILTERELEMENT VARIOBLOC | Filter element |
| K-ABLASSVENTIL AUTO | Fully-automatic drain valve with Adapter G 1/8 |