


# K-WFV 3/2 NICHT RASTEND FUS

3/2-way foot-operated valves (monostable, non-latching, with foot guard)

**HANSA** **FLEX**

## Caratteristiche

Pressione d'esercizio	2.5 - 10 bar
Campo della temperatura:	-10 °C to +60 °C
Portata a 6,3 bar e Δ 0,5 bar	60 NL/min (4 mm and M5), 640 NL/min (G 1/4)
Portata a 6,3 bar e Δ 1 bar	95 NL/min (4 mm and M5), 840 NL/min (G 1/4)

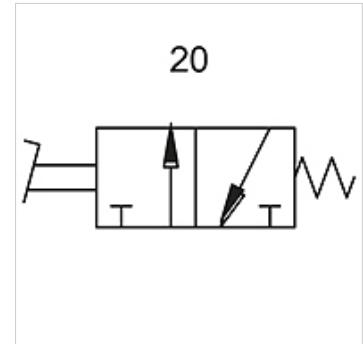

## Nota

Altri dati su richiesta.

## Descrizione

Foot-operated valves, 3/2- and 5/2-way types, bistable or monostable (non-latching).

## Articolo

Denominazione	Attacco	Numero schema
K- 07 15 00 19	M 5	20
K- 07 15 00 20	4 mm	20