K-KURZH ZYL DOPPELW ACP


Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Caratteristiche

Mezzi	Filtered compressed air, lubricated (ensure continuity) or unlubricated
Pressione d'esercizio	max. 10 bar
Pressione di intervento	0,6 bar (Ø 12 bis Ø 32), 0,4 bar (Ø 40 bis Ø 80)
Campo della temperatura:	-10 °C to +80 °C
Stelo del pistone	C45 steel, hard chrome-plated
Tubo	Aluminium alloy, anodised
Diametro testa	Ø 12 to Ø 25 painted brass, Ø 32 to Ø 80 aluminium
Pistone	Ø 12 to Ø 63 synthetic (acetal) resin, Ø 80 alu/ PTFE
Guarnizione stelo pistone	NBR (additional charge for PU and FKM)
Guarnizione pistone	NBR (additional charge for PU and FKM)



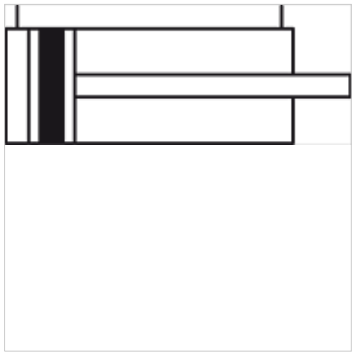

Nota

Altri dati su richiesta.

Descrizione

Suitable for installation in limited spaces, with magnet.

Informazioni supplementari

Important: The scope of supply does not include a connector. Please order separately.

Other types, e.g. increased thermal stability, non-standard strokes, through rod, non-rotating version, etc., available on request.

Articolo

Denominazione	Ø pistone	Corsa (mm)	Attacco	Filettatura interna stelo pistone
K- 07 15 11 31	12 mm	5	M 5	M 3
K- 07 15 11 32	12 mm	10	M 5	M 3
K- 07 15 11 33	12 mm	25	M 5	M 3
K- 07 15 11 34	12 mm	30	M 5	M 3
K- 07 15 11 35	12 mm	40	M 5	M 3
K- 07 15 11 36	16 mm	5	M 5	M 5
K- 07 15 11 37	16 mm	10	M 5	M 5
K- 07 15 11 38	16 mm	25	M 5	M 5
K- 07 15 11 39	16 mm	30	M 5	M 5
K- 07 15 11 40	16 mm	40	M 5	M 5
K- 07 15 11 41	20 mm	5	M 5	M 5
K- 07 15 11 42	20 mm	10	M 5	M 5
K- 07 15 11 43	20 mm	25	M 5	M 5
K- 07 15 11 44	20 mm	30	M 5	M 5
K- 07 15 11 45	20 mm	40	M 5	M 5
K- 07 15 11 46	20 mm	50	M 5	M 5
K- 07 15 11 47	25 mm	5	G 1/8	M 5
K- 07 15 11 48	25 mm	10	G 1/8	M 5
K- 07 15 11 49	25 mm	25	G 1/8	M 5
K- 07 15 11 50	25 mm	30	G 1/8	M 5
K- 07 15 11 51	25 mm	40	G 1/8	M 5
K- 07 15 11 52	25 mm	50	G 1/8	M 5
K- 07 15 11 53	32 mm	5	G 1/8	M 6
K- 07 15 11 54	32 mm	10	G 1/8	M 6
K- 07 15 11 55	32 mm	25	G 1/8	M 6
K- 07 15 11 56	32 mm	30	G 1/8	M 6
K- 07 15 11 57	32 mm	40	G 1/8	M 6
K- 07 15 11 58	32 mm	50	G 1/8	M 6
K- 07 15 11 59	40 mm	5	G 1/8	M 6
K- 07 15 11 60	40 mm	10	G 1/8	M 6
K- 07 15 11 61	40 mm	25	G 1/8	M 6
K- 07 15 11 62	40 mm	30	G 1/8	M 6

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.

K-KURZH ZYL DOPPELW ACP

Short-stroke cylinders, double acting (magnetic, non-cushioned)

HANSA-FLEX

Articolo

Denominazione	Ø pistone	Corsa (mm)	Attacco	Filettatura interna stelo pistone
K- 07 15 11 63	40 mm	40	G 1/8	M 6
K- 07 15 11 64	40 mm	50	G 1/8	M 6
K- 07 15 11 65	50 mm	5	G 1/8	M 8
K- 07 15 11 66	50 mm	10	G 1/8	M 8
K- 07 15 11 67	50 mm	25	G 1/8	M 8
K- 07 15 11 68	50 mm	30	G 1/8	M 8
K- 07 15 11 69	50 mm	40	G 1/8	M 8
K- 07 15 11 70	50 mm	50	G 1/8	M 8
K- 07 15 11 71	50 mm	70	G 1/8	M 8
K- 07 15 11 72	63 mm	5	G 1/8	M 8
K- 07 15 11 73	63 mm	10	G 1/8	M 8
K- 07 15 11 74	63 mm	25	G 1/8	M 8
K- 07 15 11 75	63 mm	30	G 1/8	M 8
K- 07 15 11 76	63 mm	40	G 1/8	M 8
K- 07 15 11 77	63 mm	50	G 1/8	M 8
K- 07 15 11 78	63 mm	70	G 1/8	M 8
K- 07 15 11 79	80 mm	5	G 1/4	M 10
K- 07 15 11 80	80 mm	10	G 1/4	M 10
K- 07 15 11 81	80 mm	25	G 1/4	M 10
K- 07 15 11 82	80 mm	30	G 1/4	M 10
K- 07 15 11 83	80 mm	40	G 1/4	M 10
K- 07 15 11 84	80 mm	50	G 1/4	M 10
K- 07 15 11 85	80 mm	70	G 1/4	M 10
K- 07 15 11 86	80 mm	100	G 1/4	M 10

Accessori

K-MAGNETSENSOREN-REED	Reed magnetic sensor (incl. 2.5 m cable)

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.