

K-DRG MINI O SEKUNDAERENTLUEFTUNG

Mini pressure regulators

HANSA FLEX

Caratteristiche

Campo della temperatura: -20 °C to +60 °C

Pressione Max. 12 bar



Intervallo di pressione Max. 12 bar

Temperatura -20 °C to +60 °C

Portata 0 - 400 l/min

Molla Stainless-steel

Alloggiamento Brass

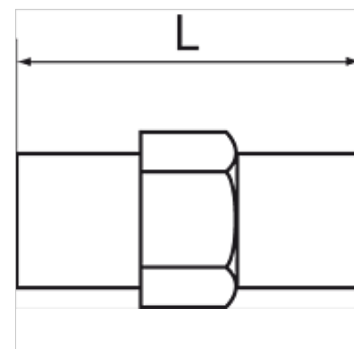

Nota

Altri dati su richiesta.

Descrizione

This preset pressure regulator guarantees optimal pressure conditions, especially in blow guns. The pressure regulator is inserted into the compressed air line. Fits onto any 1/4" thread and maintains the pressure at optimum, thus helping to reduce the costs for energy. Tamper-proof.

Articolo

Denominazione	Filetto	Pressione di lavoro preimpostata	L (mm)
K- 07 25 03 03	G 1/4 außen/male	2 bar	24,0
K- 07 25 03 04	G 1/4 außen/male	4 bar	24,0
K- 07 25 03 05	G 1/4 außen/male	6 bar	24,0