


K-VT 2 ABGAENGE G

Manifolds

HANSA FLEX

Caratteristiche

| | |
|------------------------|------------------------|
| Pressione d'ingresso | 0 - 9 bar |
| Temperatura del fluido | max. 70 °C |
| Temperatura ambiente | Max. 70 °C |
| Materiale di tenuta | NBR |
| Alloggiamento | Die-cast aluminium |
| Altri dati | User manual on request |

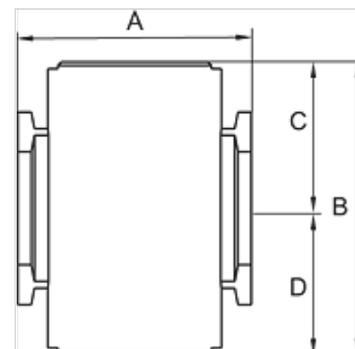

Articolo

| Denominazione | Filetto | A (mm) | B | C (mm) | D (mm) | Dimensioni strutturali |
|----------------|---------|-----------|---------|-----------|-----------|------------------------|
| K- 07 25 12 19 | G 1/4 | 35,0 | 44,0 mm | 22,0 | 22,0 | 200 |
| K- 07 25 12 20 | G 3/8 | 35,0 | 44,0 mm | 22,0 | 22,0 | 200 |
| K- 07 25 12 21 | G 3/8 | 42,0 | 52,0 mm | 26,0 | 26,0 | 300 |
| K- 07 25 12 22 | G 1/2 | 42,0 | 52,0 mm | 26,0 | 26,0 | 300 |
| K- 07 25 12 23 | G 3/4 | 60,0 | 76,0 mm | 38,0 | 38,0 | 600 |
| K- 07 25 12 24 | G 1 | 60,0 | 76,0 mm | 38,0 | 38,0 | 600 |

Accessori

| | |
|----------------------|-----------------|
| K-VERBINDUNGELEMENTE | Connecting sets |
| K-WANDHALTER | Wall bracket |