


K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials

HANSA FLEX

Caratteristiche

Mezzi	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Pressione di lavoro	1 - 10 bar
Campo della temperatura:	-20 °C to +80 °C
Stelo del pistone	Hardened steel, thick-chromed
Tubo	Aluminium jacket with integrated T-slots
Pistone	Aluminium
Guarnizione pistone	TPU (thermoplastic polyurethane)
Guarnizione stelo pistone	TPU (thermoplastic polyurethane)
Materiale di tenuta o-ring	NBR

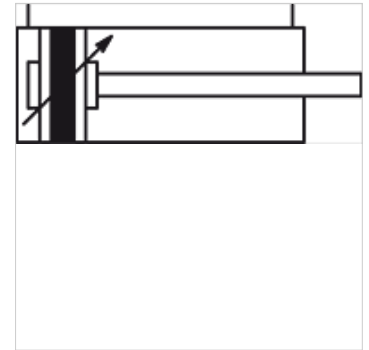

Nota

Altri dati su richiesta.

Descrizione

These cylinders are ideal for a wide range of applications owing to their robust design and excellent value for money. The standard type has a double-acting cylinder and features a magnetic piston as well as integrated cushioning. The magnetic switches are mounted in T-slots on three sides of the body.

Informazioni supplementari

Important: The scope of supply does not include a connector. Please order separately.

Stroke 1000 available on request.

Articolo

Denominazione	Ø pistone	Corsa (mm)	Attacco	Ø stelo pistone (mm)	Filettatura esterna stelo pistone
K- 07 15 14 66	32 mm	25	G 1/8	12	M 10 x 1.25
K- 07 15 14 67	32 mm	50	G 1/8	12	M 10 x 1.25
K- 07 15 14 68	32 mm	75	G 1/8	12	M 10 x 1.25
K- 07 15 14 69	32 mm	80	G 1/8	12	M 10 x 1.25
K- 07 15 14 70	32 mm	100	G 1/8	12	M 10 x 1.25
K- 07 15 14 71	32 mm	125	G 1/8	12	M 10 x 1.25
K- 07 15 14 72	32 mm	150	G 1/8	12	M 10 x 1.25
K- 07 15 14 73	32 mm	160	G 1/8	12	M 10 x 1.25
K- 07 15 14 74	32 mm	175	G 1/8	12	M 10 x 1.25
K- 07 15 14 75	32 mm	200	G 1/8	12	M 10 x 1.25
K- 07 15 14 76	32 mm	250	G 1/8	12	M 10 x 1.25
K- 07 15 14 77	32 mm	300	G 1/8	12	M 10 x 1.25
K- 07 15 14 78	32 mm	350	G 1/8	12	M 10 x 1.25
K- 07 15 14 79	32 mm	400	G 1/8	12	M 10 x 1.25
K- 07 15 14 89	40 mm	160	G 1/4	16	M 12 x 1.25
K- 07 15 14 80	32 mm	450	G 1/8	12	M 10 x 1.25
K- 07 15 14 81	32 mm	500	G 1/8	12	M 10 x 1.25
K- 07 15 14 82	40 mm	25	G 1/4	16	M 12 x 1.25
K- 07 15 14 83	40 mm	50	G 1/4	16	M 12 x 1.25
K- 07 15 14 84	40 mm	75	G 1/4	16	M 12 x 1.25
K- 07 15 14 85	40 mm	80	G 1/4	16	M 12 x 1.25
K- 07 15 14 86	40 mm	100	G 1/4	16	M 12 x 1.25
K- 07 15 14 87	40 mm	125	G 1/4	16	M 12 x 1.25
K- 07 15 14 88	40 mm	150	G 1/4	16	M 12 x 1.25
K- 07 15 14 90	40 mm	175	G 1/4	16	M 12 x 1.25
K- 07 15 14 91	40 mm	200	G 1/4	16	M 12 x 1.25
K- 07 15 14 92	40 mm	250	G 1/4	16	M 12 x 1.25
K- 07 15 14 93	40 mm	300	G 1/4	16	M 12 x 1.25
K- 07 15 14 94	40 mm	350	G 1/4	16	M 12 x 1.25
K- 07 15 14 95	40 mm	400	G 1/4	16	M 12 x 1.25
K- 07 15 14 96	40 mm	450	G 1/4	16	M 12 x 1.25
K- 07 15 14 97	40 mm	500	G 1/4	16	M 12 x 1.25
K- 07 15 14 98	40 mm	600	G 1/4	16	M 12 x 1.25



Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.

22.07.2024

HANSA-FLEX AG

www.hansa-flex.com

1

K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials

HANSA FLEX

Articolo

Denominazione	Ø pistone	Corsa (mm)	Attacco	Ø stelo pistone (mm)	Filettatura esterna stelo pistone
K- 07 15 14 99	40 mm	700	G 1/4	16	M 12 x 1.25
K- 07 15 15 00	40 mm	800	G 1/4	16	M 12 x 1.25
K- 07 15 15 01	50 mm	25	G 1/4	20	M 16 x 1.5
K- 07 15 15 02	50 mm	50	G 1/4	20	M 16 x 1.5
K- 07 15 15 03	50 mm	75	G 1/4	20	M 16 x 1.5
K- 07 15 15 04	50 mm	80	G 1/4	20	M 16 x 1.5
K- 07 15 15 05	50 mm	100	G 1/4	20	M 16 x 1.5
K- 07 15 15 06	50 mm	1000	G 1/4	20	M 16 x 1.5
K- 07 15 15 07	50 mm	125	G 1/4	20	M 16 x 1.5
K- 07 15 15 08	50 mm	150	G 1/4	20	M 16 x 1.5
K- 07 15 15 09	50 mm	160	G 1/4	20	M 16 x 1.5
K- 07 15 15 10	50 mm	175	G 1/4	20	M 16 x 1.5
K- 07 15 15 11	50 mm	200	G 1/4	20	M 16 x 1.5
K- 07 15 15 12	50 mm	250	G 1/4	20	M 16 x 1.5
K- 07 15 15 13	50 mm	300	G 1/4	20	M 16 x 1.5
K- 07 15 15 14	50 mm	350	G 1/4	20	M 16 x 1.5
K- 07 15 15 15	50 mm	400	G 1/4	20	M 16 x 1.5
K- 07 15 15 16	50 mm	450	G 1/4	20	M 16 x 1.5
K- 07 15 15 17	50 mm	500	G 1/4	20	M 16 x 1.5
K- 07 15 15 18	50 mm	600	G 1/4	20	M 16 x 1.5
K- 07 15 15 19	50 mm	700	G 1/4	20	M 16 x 1.5
K- 07 15 15 20	50 mm	800	G 1/4	20	M 16 x 1.5
K- 07 15 15 21	50 mm	900	G 1/4	20	M 16 x 1.5
K- 07 15 15 22	63 mm	25	G 3/8	20	M 16 x 1.5
K- 07 15 15 23	63 mm	50	G 3/8	20	M 16 x 1.5
K- 07 15 15 24	63 mm	75	G 3/8	20	M 16 x 1.5
K- 07 15 15 25	63 mm	80	G 3/8	20	M 16 x 1.5
K- 07 15 15 26	63 mm	100	G 3/8	20	M 16 x 1.5
K- 07 15 15 27	63 mm	1000	G 3/8	20	M 16 x 1.5
K- 07 15 15 28	63 mm	125	G 3/8	20	M 16 x 1.5
K- 07 15 15 29	63 mm	150	G 3/8	20	M 16 x 1.5
K- 07 15 15 30	63 mm	160	G 3/8	20	M 16 x 1.5
K- 07 15 15 31	63 mm	175	G 3/8	20	M 16 x 1.5
K- 07 15 15 32	63 mm	200	G 3/8	20	M 16 x 1.5
K- 07 15 15 33	63 mm	250	G 3/8	20	M 16 x 1.5
K- 07 15 15 34	63 mm	300	G 3/8	20	M 16 x 1.5
K- 07 15 15 35	63 mm	350	G 3/8	20	M 16 x 1.5
K- 07 15 15 36	63 mm	400	G 3/8	20	M 16 x 1.5
K- 07 15 15 37	63 mm	450	G 3/8	20	M 16 x 1.5
K- 07 15 15 38	63 mm	500	G 3/8	20	M 16 x 1.5
K- 07 15 15 39	63 mm	600	G 3/8	20	M 16 x 1.5
K- 07 15 15 40	63 mm	700	G 3/8	20	M 16 x 1.5
K- 07 15 15 41	63 mm	800	G 3/8	20	M 16 x 1.5
K- 07 15 15 42	63 mm	900	G 3/8	20	M 16 x 1.5
K- 07 15 15 43	80 mm	25	G 3/8	25	M 20 x 1.5
K- 07 15 15 44	80 mm	50	G 3/8	25	M 20 x 1.5
K- 07 15 15 45	80 mm	75	G 3/8	25	M 20 x 1.5
K- 07 15 15 46	80 mm	80	G 3/8	25	M 20 x 1.5
K- 07 15 15 47	80 mm	100	G 3/8	25	M 20 x 1.5
K- 07 15 15 48	80 mm	1000	G 3/8	25	M 20 x 1.5
K- 07 15 15 49	80 mm	125	G 3/8	25	M 20 x 1.5
K- 07 15 15 50	80 mm	150	G 3/8	25	M 20 x 1.5
K- 07 15 15 51	80 mm	160	G 3/8	25	M 20 x 1.5
K- 07 15 15 52	80 mm	175	G 3/8	25	M 20 x 1.5
K- 07 15 15 53	80 mm	200	G 3/8	25	M 20 x 1.5
K- 07 15 15 54	80 mm	250	G 3/8	25	M 20 x 1.5
K- 07 15 15 55	80 mm	300	G 3/8	25	M 20 x 1.5
K- 07 15 15 56	80 mm	350	G 3/8	25	M 20 x 1.5
K- 07 15 15 57	80 mm	400	G 3/8	25	M 20 x 1.5
K- 07 15 15 58	80 mm	450	G 3/8	25	M 20 x 1.5
K- 07 15 15 59	80 mm	500	G 3/8	25	M 20 x 1.5
K- 07 15 15 60	80 mm	600	G 3/8	25	M 20 x 1.5
K- 07 15 15 61	80 mm	700	G 3/8	25	M 20 x 1.5



Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.

22.07.2024

HANSA-FLEX AG

www.hansa-flex.com

K-NORMZYLINDER AIRSENTIALS SE

Standard cylinders - AirSentials



Articolo

Denominazione	Ø pistone	Corsa (mm)	Attacco	Ø stelo pistone (mm)	Filettatura esterna stelo pistone
K- 07 15 15 62	80 mm	800	G 3/8	25	M 20 x 1.5
K- 07 15 15 63	80 mm	900	G 3/8	25	M 20 x 1.5
K- 07 15 14 26	100 mm	25	G 1/2"	25	M 20 x 1.5
K- 07 15 14 27	100 mm	50	G 1/2"	25	M 20 x 1.5
K- 07 15 14 28	100 mm	75	G 1/2"	25	M 20 x 1.5
K- 07 15 14 29	100 mm	80	G 1/2"	25	M 20 x 1.5
K- 07 15 14 30	100 mm	100	G 1/2"	25	M 20 x 1.5
K- 07 15 14 31	100 mm	125	G 1/2"	25	M 20 x 1.5
K- 07 15 14 32	100 mm	150	G 1/2"	25	M 20 x 1.5
K- 07 15 14 33	100 mm	160	G 1/2"	25	M 20 x 1.5
K- 07 15 14 34	100 mm	175	G 1/2"	25	M 20 x 1.5
K- 07 15 14 35	100 mm	200	G 1/2"	25	M 20 x 1.5
K- 07 15 14 36	100 mm	250	G 1/2"	25	M 20 x 1.5
K- 07 15 14 37	100 mm	300	G 1/2"	25	M 20 x 1.5
K- 07 15 14 38	100 mm	350	G 1/2"	25	M 20 x 1.5
K- 07 15 14 39	100 mm	400	G 1/2"	25	M 20 x 1.5
K- 07 15 14 40	100 mm	450	G 1/2"	25	M 20 x 1.5
K- 07 15 14 41	100 mm	500	G 1/2"	25	M 20 x 1.5
K- 07 15 14 42	100 mm	600	G 1/2"	25	M 20 x 1.5
K- 07 15 14 43	100 mm	700	G 1/2"	25	M 20 x 1.5
K- 07 15 14 44	100 mm	800	G 1/2"	25	M 20 x 1.5
K- 07 15 14 45	100 mm	900	G 1/2"	25	M 20 x 1.5
K- 07 15 14 46	125 mm	25	G 1/2"	32	M 27 x 2
K- 07 15 14 47	125 mm	50	G 1/2"	32	M 27 x 2
K- 07 15 14 48	125 mm	75	G 1/2"	32	M 27 x 2
K- 07 15 14 49	125 mm	80	G 1/2"	32	M 27 x 2
K- 07 15 14 50	125 mm	100	G 1/2"	32	M 27 x 2
K- 07 15 14 51	125 mm	125	G 1/2"	32	M 27 x 2
K- 07 15 14 52	125 mm	150	G 1/2"	32	M 27 x 2
K- 07 15 14 53	125 mm	160	G 1/2"	32	M 27 x 2
K- 07 15 14 54	125 mm	175	G 1/2"	32	M 27 x 2
K- 07 15 14 55	125 mm	200	G 1/2"	32	M 27 x 2
K- 07 15 14 56	125 mm	250	G 1/2"	32	M 27 x 2
K- 07 15 14 57	125 mm	300	G 1/2"	32	M 27 x 2
K- 07 15 14 58	125 mm	350	G 1/2"	32	M 27 x 2
K- 07 15 14 59	125 mm	400	G 1/2"	32	M 27 x 2
K- 07 15 14 60	125 mm	450	G 1/2"	32	M 27 x 2
K- 07 15 14 61	125 mm	500	G 1/2"	32	M 27 x 2
K- 07 15 14 62	125 mm	600	G 1/2"	32	M 27 x 2
K- 07 15 14 63	125 mm	700	G 1/2"	32	M 27 x 2
K- 07 15 14 64	125 mm	800	G 1/2"	32	M 27 x 2
K- 07 15 14 65	125 mm	900	G 1/2"	32	M 27 x 2

Accessori

K-FUSSBEFESTIGUNG TYP LB 2	Foot model, »LB« type
K-SCHWENKLAGEBOECKE TYP TF	Hinge bracket model, »TF« type (only in conjunction with hinge head model, »FTC« type)
K-GEGENLAGER TYP CR	Counter-hinge model, »CR« type (only in conjunction with female hinge model, »CB« type)
K-SCHWENKGABELBEFESTIG FTC	Hinge head model, »FTC« type
K-SCHWENKLAGE TYP TM	Hinge model, »TM« type (only in conjunction with hinge head model, »FTC« type)
K-SCHWENKGABELBEFESTIG CB	Female hinge model, »CB« type
K-SCHWENKAUGENBEFESTIG CA	Male hinge model, »CA« type
K-FLANSCHBEFESTIGUNG TYP FA1	Flange model, »FA« type
K-GABELKOEPFEN TYP Y	Fork model, »Y« type
K-GELENKAUGEN TYP UNIT	Rod eye model, »UNIT« type
K-SENSOREN CS1 NO MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 NO OHNE STECKER	Sensors »CS1« type, cable without plug