



# K-XRD STECKANSCHLUSS Z SCH AGR-K BE

Straight non-return valves, flow direction from port to tube, conical male thread, coated

**HANSA FLEX**

## Caratteristiche

Pressione di lavoro	Max. 10 bar, vacuum
Campo di impiego	Air, vacuum
Tubi flessibili consigliati	PU or PA (nylon)
Mezzi	Aria compressa
Norma	R thread acc. to ISO 7-1, thread coating
Campo della temperatura:	0 °C to +60 °C
Superficie di tenuta	Conical version: thread coating
Materiale	Plastic, Nickel plated brass
Anello di compressione	Plastic

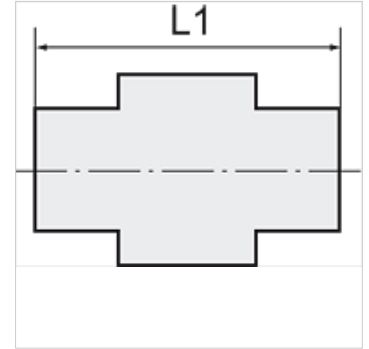

## Nota

Altri dati su richiesta.

## Descrizione

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	Pressione di apertura (bar)	SW
K- 07 40 08 88	R 1/8	4 mm	24,0	0,2	10 mm
K- 07 40 08 89	R 1/8	6 mm	31,0	0,2	12 mm
K- 07 40 08 90	R 1/8	8 mm	32,8	0,2	14 mm
K- 07 40 08 86	R 1/4	6 mm	33,0	0,2	14 mm
K- 07 40 08 87	R 1/4	8 mm	34,8	0,2	14 mm
K- 07 40 08 91	R 3/8	10 mm	41,0	0,2	17 mm
K- 07 40 08 92	R 3/8	12 mm	42,5	0,2	21 mm
K- 07 40 08 84	R 1/2	10 mm	43,0	0,2	21 mm
K- 07 40 08 85	R 1/2	12 mm	44,5	0,2	21 mm