# K-T-VB POM
Union tees

## Caratteristiche

| | |
|---|---|
| **Pressione di lavoro** | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| **Temperatura d'esercizio** | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| **Materiale** | Acetalpolymerisat (POM) |
| **Materiale di tenuta** | NBR |



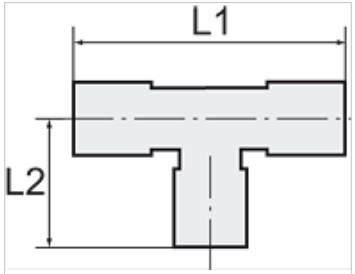


## Nota
Altri dati su richiesta.

## Descrizione
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Articolo

| Denominazione | per diametro esterno del tubo flessibile Ø mm | L1 (mm) | L2 (mm) |
|---|---|---|---|
| **K- 07 40 28 63** | 4 mm | 37,1 | 18,5 |
| **K- 07 40 28 64** | 5 mm | 36,9 | 18,4 |
| **K- 07 40 28 65** | 6 mm | 41,0 | 20,5 |
| **K- 07 40 28 66** | 8 mm | 44,0 | 22,0 |
| **K- 07 40 28 67** | 10 mm | 52,6 | 26,3 |
| **K- 07 40 28 68** | 12 mm | 66,4 | 33,2 |
| **K- 07 40 28 69** | 15 mm | 76,8 | 38,4 |
| **K- 07 40 28 70** | 18 mm | 90,6 | 45,3 |
| **K- 07 40 28 71** | 22 mm | 99,3 | 49,6 |
| **K- 07 40 28 72** | 28 mm | 126,2 | 63,1 |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*