
K-X-STECKVERBINDUNG 1

X-unions

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +80 °C
Materiale	Ottone nichelato
Anello di compressione	Hostaform
Anello elastico	Stainless steel



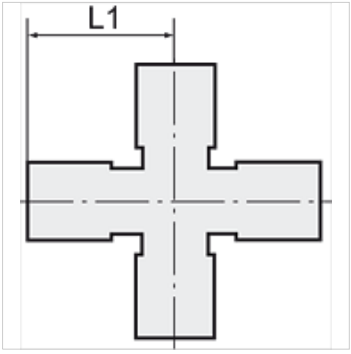

Nota

Altri dati su richiesta.

Descrizione

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)
K- 07 40 47 29	4 mm	18,6
K- 07 40 47 30	6 mm	21,9
K- 07 40 47 31	8 mm	25,4

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.