



# K-XRD STECKANSCHLUSS Z GEW AGR OR

Straight non-return valves, flow direction from tube to port, parallel male thread with O-ring

**HANSA FLEX**

## Caratteristiche

|                                    |  |
|------------------------------------|--|
| <b>Pressione di lavoro</b>         | Max. 10 bar, vacuum  |
| <b>Campo di impiego</b>            | Air, vacuum  |
| <b>Tubi flessibili consigliati</b> | PU or PA (nylon)   |
| <b>Mezzi</b>                       | Aria compressa   |
| <b>Norma</b>                       | M thread acc. to DIN 13-1, with O-Ring<br>G thread acc. to DIN EN ISO 228-1, with O-Ring |
| <b>Campo della temperatura:</b>    | 0 °C to +60 °C   |
| <b>Superficie di tenuta</b>        | O-ring (NBR)   |
| <b>Materiale</b>                   | Plastic, Nickel plated brass   |
| <b>Anello di compressione</b>      | Plastic  |

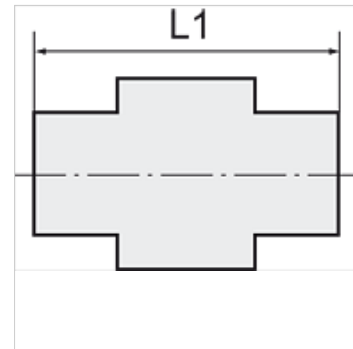

## Nota

Altri dati su richiesta.

## Descrizione

The non-return function of these push-in fittings prevents the air from flowing back. The unidirectional design means air flow is only possible in one direction. These valves are available with air flow from the port to the tube or from the tube to the port.

## Articolo

| Denominazione  | Filetto | per diametro esterno del tubo flessibile Ø mm | L1<br>(mm) | Pressione di apertura<br>(bar) | SW    |
|----------------|---------|---|------------|--------------------------------|-------|
| K- 07 40 08 83 | M 5     | 4 mm  | 31,0       | 0,2                            | 10 mm |
| K- 07 40 08 78 | G 1/8   | 4 mm  | 24,2       | 0,2                            | 14 mm |
| K- 07 40 08 79 | G 1/8   | 6 mm  | 31,0       | 0,2                            | 14 mm |
| K- 07 40 08 80 | G 1/8   | 8 mm  | 32,8       | 0,2                            | 14 mm |
| K- 07 40 08 76 | G 1/4   | 6 mm  | 33,0       | 0,2                            | 17 mm |
| K- 07 40 08 77 | G 1/4   | 8 mm  | 34,8       | 0,2                            | 17 mm |
| K- 07 40 08 81 | G 3/8   | 10 mm   | 41,0       | 0,2                            | 20 mm |
| K- 07 40 08 82 | G 3/8   | 12 mm   | 42,5       | 0,2                            | 21 mm |
| K- 07 40 08 74 | G 1/2   | 10 mm   | 43,0       | 0,2                            | 24 mm |
| K- 07 40 08 75 | G 1/2   | 12 mm   | 44,5       | 0,2                            | 24 mm |