


# K-L-STECK VERS DER AG-K BE

Male branch tees, angled plug connections, swivel type, conical male thread, coated

**HANSA FLEX**

## Caratteristiche

<b>Pressione di lavoro</b>	Max. 15 bar, coarse vacuum
<b>Campo di impiego</b>	Air, vacuum
<b>Tubi flessibili consigliati</b>	PU or PA (nylon)
<b>Mezzi</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Campo della temperatura:</b>	-20 °C to +80 °C
<b>Superficie di tenuta</b>	Conical version: thread coating
<b>Materiale</b>	Plastic, Nickel plated brass
<b>Anello di compressione</b>	Plastic

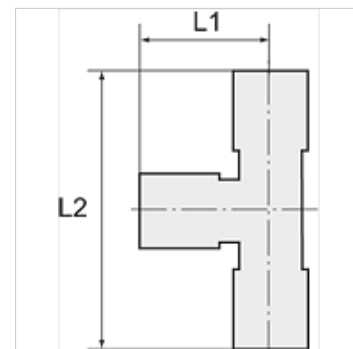

## Nota

Altri dati su richiesta.

## Descrizione

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)	SW
K- 07 40 02 51	R 1/8	4 mm	18,0	37,1	10 mm
K- 07 40 02 52	R 1/8	6 mm	20,1	40,1	10 mm
K- 07 40 02 53	R 1/8	8 mm	22,7	46,1	10 mm
K- 07 40 02 50	R 1/8	10 mm	26,9	52,3	17 mm
K- 07 40 02 47	R 1/4	4 mm	18,0	38,6	14 mm
K- 07 40 02 48	R 1/4	6 mm	20,1	41,6	14 mm
K- 07 40 02 49	R 1/4	8 mm	22,7	44,7	14 mm
K- 07 40 02 45	R 1/4	10 mm	26,9	54,3	17 mm
K- 07 40 02 46	R 1/4	12 mm	29,3	57,9	17 mm
K- 07 40 02 57	R 3/8	6 mm	20,1	43,1	17 mm
K- 07 40 02 58	R 3/8	8 mm	22,7	46,2	17 mm
K- 07 40 02 54	R 3/8	10 mm	26,9	52,8	17 mm
K- 07 40 02 55	R 3/8	12 mm	29,3	56,4	17 mm
K- 07 40 02 56	R 3/8	16 mm	34,5	68,2	20 mm
K- 07 40 02 43	R 1/2	6 mm	20,1	46,1	21 mm
K- 07 40 02 44	R 1/2	8 mm	22,7	49,2	21 mm
K- 07 40 02 40	R 1/2	10 mm	26,9	55,8	21 mm
K- 07 40 02 41	R 1/2	12 mm	29,3	59,4	21 mm
K- 07 40 02 42	R 1/2	16 mm	34,5	71,2	21 mm