


K-FI AK KOH METALLBEHAEL SI VARIOBL

Activated carbon filters with metal bowl incl. sight glass

HANSA FLEX

Caratteristiche

| | |
|---|--|
| Pressione d'ingresso | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Temperatura del fluido | max. 50 °C |
| Temperatura ambiente | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| Qualità dell'aria ISO 85731 | Class 1 dirt, class 1 oil |
| Tenore di olio residuo | 0,003 mg/m ³ |
| Misurazione del valore della portata | At P1 = 7 bar and pressure drop $\Delta p = 0,1$ bar |

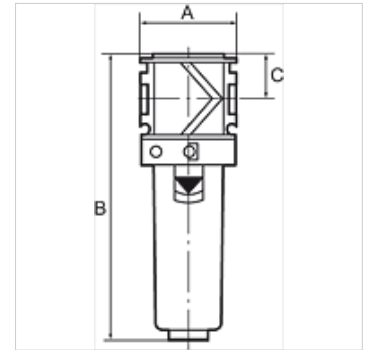

Nota

Activated carbon filters are also supplied with protective cage or metal container.
Altri dati su richiesta.

Descrizione

The activated carbon filter absorbs oil vapour from the compressed air. The entering compressed air needs to be dry and free of contaminants (an upstream microfilter is strongly recommended).

Articolo

| Denominazione | Filetto | Portata (L/min) | A (mm) | B | C (mm) |
|----------------|---------|--------------------|-----------|----------|-----------|
| K- 07 25 23 07 | G 1/4 | 800 | 48,0 | 142,0 mm | 22,0 |
| K- 07 25 23 08 | G 3/8 | 1000 | 48,0 | 142,0 mm | 22,0 |
| K- 07 25 23 09 | G 1/2 | 1200 | 70,0 | 193,0 mm | 26,0 |
| K- 07 25 23 10 | G 3/4 | 1300 | 70,0 | 193,0 mm | 26,0 |
| K- 07 25 23 11 | G 1 | 1300 | 124,0 | 193,0 mm | 26,0 |