
K-T-VB PP
Union tees

Caratteristiche

Pressione di lavoro	on request
Temperatura d'esercizio	Max. +20 °C
Materiale	Polypropylene (PP)
Materiale di tenuta	NBR



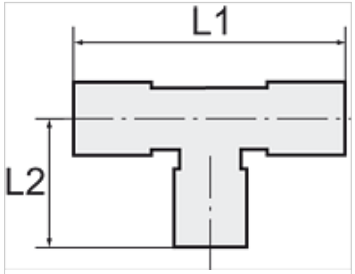

Nota
Altri dati su richiesta.

Descrizione
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.