

K-VT 2 ABGAENGE G-MINI

Manifolds

HANSA FLEX

Caratteristiche


Pressione d'ingresso 0 - 9 bar

Temperatura del fluido max. 70 °C

Temperatura ambiente Max. 70 °C

Alloggiamento Die-cast aluminium

Altri dati User manual on request

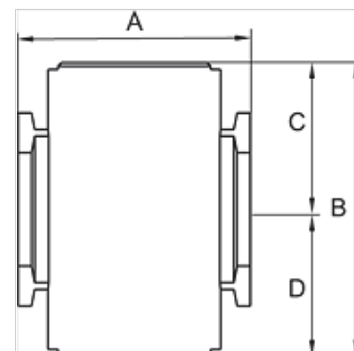

Articolo

| Denominazione | Filetto | A (mm) | B | C (mm) | D (mm) | Dimensioni strutturali |
|----------------|---------|-----------|---------|-----------|-----------|------------------------|
| K- 07 25 12 31 | G 1/8 | 28,5 | 36,0 mm | 18,0 | 18,0 | 200 |
| K- 07 25 12 32 | G 1/4 | 28,5 | 36,0 mm | 18,0 | 18,0 | 200 |

Accessori

K-VERBINDUNGELEMENTE Connecting sets

K-WANDHALTER Wall bracket