

# K-SV POM
Bulkhead connectors

## Caratteristiche

| | |
|---|---|
| **Pressione di lavoro** | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| **Temperatura d'esercizio** | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| **Materiale** | Acetalpolymerisat (POM) |
| **Materiale di tenuta** | NBR |



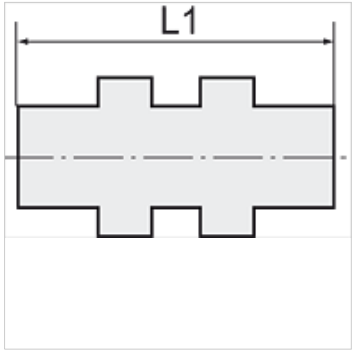


## Nota

Altri dati su richiesta.

## Descrizione

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Articolo

| Denominazione | Filetto | per diametro esterno del tubo flessibile Ø mm | L1 (mm) | SW |
|---|---|---|---|---|
| **K- 07 40 28 77** | G 3/8 | 6 mm | 36,5 | 19 mm |
| **K- 07 40 28 76** | G 1/2 | 8 mm | 42,0 | 22 mm |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*