# K-ELEKTRISCHE ANSCHLUESSE

Electrical connection (multi-pole, 25-pin, IP 65)

HANSA-FLEX

## Caratteristiche

| | |
|---|---|
| **Mezzi** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Pressione di lavoro** | Max. vacuum 10 bar (external pilots), 3 to 7 bar (internal pilots as standard) |
| **Pressione di comando** | 3 - 7 bar |
| **Campo della temperatura:** | -10 °C to +60 °C |
| **Portata** | 200 Nl/min (Ø 4), 500 Nl/min (Ø 6), 800 Nl/min (Ø 8) |
| **Numero di comandi** | Max. 16 (e.g. 16 spring return valves) |
| **Azionamento ausiliario manuale** | Latching (bistable), Monostable (non-latching) version also available on request |
| **Potenza assorbita** | 0.6 W per pilot |
| **Grado di protezione** | IP 65 |

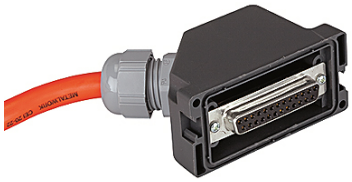

## Nota

Altri dati su richiesta.

## Descrizione

These compact valve terminals, with a maximum flow rate of 800 Nl/min, can be individually adapted to the specific conditions of each application thanks tot he wide range of functions and various input and intermediate plates.Since each valve terminal is a customer-specific combination of a series of individual elements, the catalogue only lists the available input, intermediate and end plates as well as the different valve discs and the 25-pin multi-pole connectors.

## Informazioni supplementari

Important: The scope of supply does not include a connector. Please order separately.

## Articolo

| Denominazione | Definizione |
|---|---|
| **K- 07 15 22 45** | IP 67 connector, 25-pin, with 1 m cable |
| **K- 07 15 22 46** | IP 67 connector, 25-pin, with 2.5 m cable |
| **K- 07 15 22 47** | IP 67 connector, 25-pin, with 5 m cable |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*