
K-SCHL-AUFROLLER SCHWEISS

Hose reel, welding type

Caratteristiche

Tubi flessibili	Welding hose for oxygen and acetylene, red and blue, made from synthetic rubber.
Pressione d'esercizio	max. 10 bar
Elemento di fissaggio	Wall, floor or ceiling
Ingresso	Oxygen G 1/4 male, right-hand thread with 60° inside cone, Acetylene G 3/8 male, left-hand thread with 60° inside cone



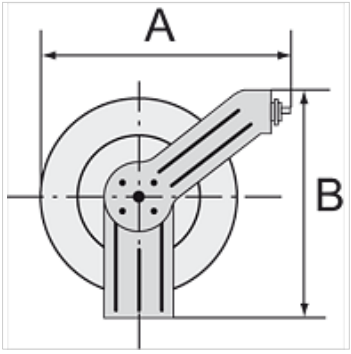

Nota

Altri dati su richiesta.

Descrizione

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. Special reel guide prevents excessive wear on the hose. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism.

Articolo

Denominazione	Dimensione tubo flessibile	Altezza (mm)	Diametro (mm)	Lunghezza tubo flessibile (m)
K- 07 10 06 28	Oxygen: 16.5 mm x 6 mm, Acetylene: 17 mm x 10 mm	360	320	15

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.