


K-SCHL-AUFROLLER LU WA S

Hose reels for compressed air and water, heavy-duty type

HANSA FLEX

Caratteristiche

| | |
|-------------------------------|------------------------|
| Materiale del tubo flessibile | Polyurethane |
| Pressione d'esercizio | max. 10 bar |
| Temperatura d'esercizio | -10 °C to +40 °C |
| Elemento di fissaggio | Wall, floor or ceiling |
| Ingresso | Hose stem 8 mm |

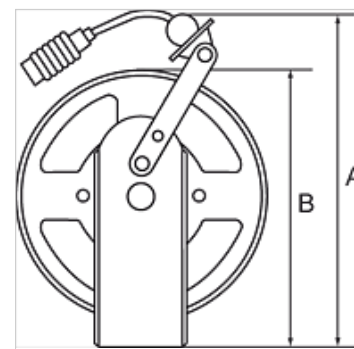

Nota

Altri dati su richiesta.

Descrizione

Heavy-duty steel design for industrial applications. Blue, powder-coated housing. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

Articolo

| Denominazione | Dimensione tubo flessibile | A (mm) | B (mm) | Lunghezza tubo flessibile (m) |
|----------------|----------------------------|-----------|-----------|----------------------------------|
| K- 07 10 06 24 | 10 mm x 6,5 mm | 420,0 | 353,0 | 10 |
| K- 07 10 06 25 | 10 mm x 6,5 mm | 420,0 | 353,0 | 20 |
| K- 07 10 06 26 | 12 mm x 8 mm | 420,0 | 353,0 | 15 |
| K- 07 10 06 27 | 16 mm x 11 mm | 420,0 | 353,0 | 15 |