

# K-SCHL-AUFROLLER MOBIL

Hose reels for mobile applications

## Caratteristiche

| | |
|---|---|
| **Materiale del tubo flessibile** | Polyurethane |
| **Pressione d'esercizio** | max. 10 bar |
| **Temperatura d'esercizio** | -10 °C to +40 °C |
| **Ingresso** | Hose stem 8 mm |
| **Filettatura attacco** | Coupling G 3/8 |

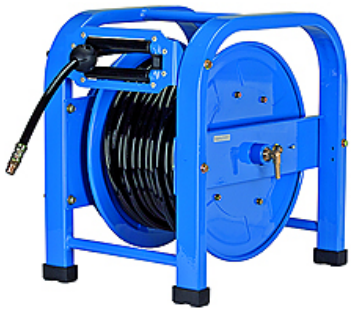




## Nota

Altri dati su richiesta.

## Descrizione

Specially designed for mobile applications. This 50 m long polyurethane hose is mounted in a portable four-wheel cart made from blue anodised steel. An automatic latching mechanism allows the hose to be engaged at any length. Enclosed spring. Precise locking device for continuous feeding or latching mechanism. Reel guide prevents excessive wear on the hose.

## Articolo

| Denominazione | Dimensione tubo flessibile | A (mm) | B (mm) | C (mm) | Lunghezza tubo flessibile (m) |
|---|---|---|---|---|---|
| **K- 07 10 06 16** | 12 mm x 8 mm | 452,0 | 400,0 | 460,0 | 50 |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*