
# K-DRUCKLUFTBEHAELTER
Compressed air tanks

## Caratteristiche

| | |
|---|---|
| **Pressione d'esercizio** | max. 11 bar |
| **Campo della temperatura:** | -10 °C to +60 °C |
| **Materiale** | steel (FeP04), plastic coated |



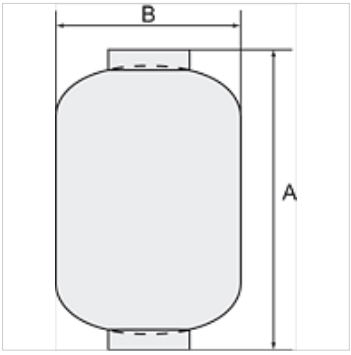


## Nota

Altri dati su richiesta.

## Descrizione

Compact steel tanks in accordance with EU Directive 97/23

## Articolo

| Denominazione | Indice (L) | Attacco | A (mm) | B |
|---|---|---|---|---|
| **K- 07 25 17 94** | 1,0 | 2 x G 1/2 female | 225,0 | 85,0 mm |
| **K- 07 25 17 95** | 2,5 | 2 x G 1/2 female | 170,0 | 160,0 mm |
| **K- 07 25 17 96** | 5,0 | 2 x G 1/2 female | 184,0 | 210,0 mm |
| **K- 07 25 17 97** | 7,0 | 2 x G 1/2 female | 240,0 | 210,0 mm |
| **K- 07 25 17 98** | 12,0 | 2 x G 1/2 female | 365,0 | 229,0 mm |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*