


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Caratteristiche

Pressione d'ingresso	Max. 10 bar
Campo della temperatura:	-10 °C to +50 °C
Mezzi	Aria compressa
Grado di protezione	IP 65
Pressione di lavoro	0.5 - 8 bar
Pressostato	Changeover contact
Amplezza dei pori dell'elemento filtrante	20 µm
Misurazione del valore della portata	At 6,3 bar and $\Delta p = 1$ bar

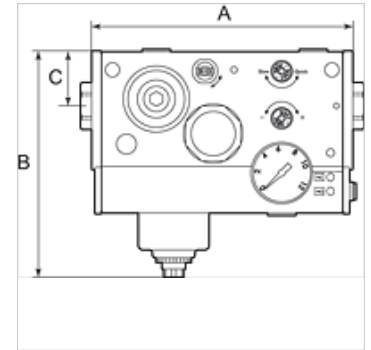

## Nota

Altri dati su richiesta.

## Descrizione

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Avvertenza per l'ordinazione

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Articolo

Denominazione	Attacco	Portata (L/min)	A (mm)	B	C (mm)	Tensione
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)