


# K-T-STECK VERS DRE AG-K BE 1

Male branch tees, swivel type, conical male thread, coated

**HANSA FLEX**

## Caratteristiche

|                         |                     |
|-------------------------|---------------------|
| Pressione di lavoro     | Max. 16 bar         |
| Temperatura d'esercizio | -20 °C to +150 °C   |
| Materiale               | Ottone nichelato    |
| Anello di compressione  | Nickel-plated brass |
| Anello elastico         | Stainless steel     |

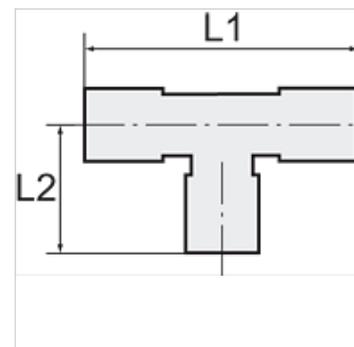

## Nota

Altri dati su richiesta.

## Descrizione

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring. All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

## Articolo

| Denominazione  | Filetto | per diametro esterno del tubo flessibile Ø mm | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|---------|---|------------|------------|-------|
| K- 07 40 28 18 | R 1/8   | 4 mm  | 40,0       | 20,0       | 13 mm |
| K- 07 40 28 19 | R 1/8   | 6 mm  | 43,0       | 20,0       | 13 mm |
| K- 07 40 28 20 | R 1/8   | 8 mm  | 47,0       | 20,0       | 13 mm |
| K- 07 40 28 16 | R 1/4   | 6 mm  | 43,0       | 25,0       | 14 mm |
| K- 07 40 28 17 | R 1/4   | 8 mm  | 47,0       | 25,0       | 14 mm |
| K- 07 40 28 15 | R 1/4   | 10 mm   | 53,0       | 26,0       | 16 mm |
| K- 07 40 28 21 | R 3/8   | 8 mm  | 47,0       | 28,0       | 18 mm |
| K- 07 40 48 02 | R 3/8   | 10 mm   | 53,0       | 30,0       | 18 mm |
| K- 07 40 48 03 | R 3/8   | 12 mm   | 58,0       | 32,5       | 20 mm |
| K- 07 40 48 01 | R 1/2   | 12 mm   | 58,0       | 35,5       | 22 mm |