

# K-VSTO POM
Plugs

## Caratteristiche

| | |
|---|---|
| **Pressione di lavoro** | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| **Temperatura d'esercizio** | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| **Materiale** | Acetalpolymerisat (POM) |
| **Materiale di tenuta** | NBR |



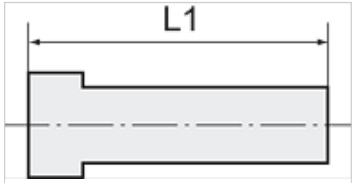


## Nota
Altri dati su richiesta.

## Descrizione
Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Articolo

| Denominazione | Colore | L1 (mm) | Manicotto (mm) |
|---|---|---|---|
| **K- 07 40 29 11** | rosso | 28,0 | 4 |
| **K- 07 40 29 12** | rosso | 28,0 | 5 |
| **K- 07 40 29 13** | rosso | 30,0 | 6 |
| **K- 07 40 29 14** | rosso | 31,0 | 8 |
| **K- 07 40 29 15** | rosso | 36,5 | 10 |
| **K- 07 40 29 16** | rosso | 38,5 | 12 |
| **K- 07 40 29 17** | nero | 45,0 | 15 |
| **K- 07 40 29 18** | nero | 41,5 | 18 |
| **K- 07 40 29 19** | nero | 45,0 | 22 |
| **K- 07 40 29 20** | nero | 56,0 | 28 |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*