


K-MV G (NC) V 230 V, 50 HZ 1

Normally closed, (NC), pilot-operated, 230 V, 50 Hz

HANSA FLEX

Caratteristiche

Collegamento elettrico	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
Grado di protezione	IP 65
Temperatura del fluido	max. 80 °C when using water or oils; max. 90 °C when using with air
Filettatura descrizione	G thread acc. DIN EN ISO 228-1
Alloggiamento, sede valvola	Brass
Parti interne	Stainless steel
Guarnizione	FPM

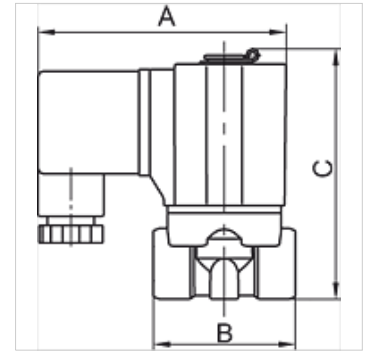

Nota

Altri dati su richiesta.

Descrizione

Standard series in two different versions: Directly operated, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

Articolo

Denominazione	Filetto	pressione d'esercizio max. (bar)	pressione d'esercizio min. (bar)	NW	A (mm)	B (mm)	C (mm)	Forma costruttiva
K- 07 30 01 72	G 1/2	10	0,50	15,0	70,0	70,0	107,0	3
K- 07 30 01 73	G 3/4	10	0,50	20,0	70,0	82,0	115,4	3
K- 07 30 01 74	G 1	10	0,50	25,0	70,0	92,0	124,0	3