


K-MV G (NC) D 230 V, 50 HZ STA 1

Normally closed, (NC), directly operated, 230 V, 50 Hz, standard type

HANSA FLEX

Caratteristiche

Collegamento elettrico	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
Filettatura descrizione	G thread acc. DIN EN ISO 228-1
Temperatura del fluido	max. 80 °C when using water or oils; max. 90 °C when using with air
Grado di protezione	IP 65
pressione d'esercizio max.	10 bar
Materiale di tenuta	FKM
Alloggiamento, sede valvola	Stainless steel 1.4301
Parti interne	Stainless steel
Materiale	sealing: FKM (FPM)

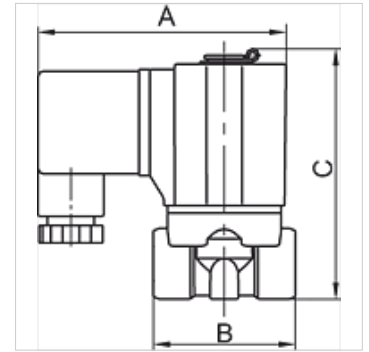

Nota

Altri dati su richiesta.

Descrizione

Standard series in two different versions: Directly operated, Pilot-operated

Articolo

Denominazione	Filetto	NW	A (mm)	B (mm)	C (mm)	Forma costruttiva
K- 07 30 01 12	G 1/8	3,0	70,0	40,0	70,7	1
K- 07 30 01 13	G 1/4	3,0	70,0	40,0	70,7	1
K- 07 30 01 14	G 3/8	5,0	85,0	52,0	87,0	1
K- 07 30 01 15	G 1/2	5,0	85,0	52,0	87,0	1