


# K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series

**HANSA FLEX**

## Caratteristiche

<b>Mezzi</b>	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
<b>Pressione di lavoro</b>	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
<b>Campo della temperatura:</b>	-20 °C to +80 °C
<b>Stelo del pistone</b>	Hardened steel, thick-chromed
<b>Pistone</b>	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
<b>Materiale di tenuta</b>	NBR
<b>Tubo cilindrico</b>	Aluminium

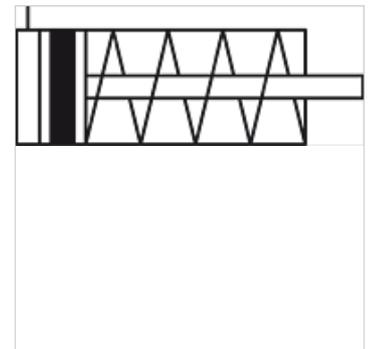

## Descrizione

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

Series "ASQ", single-acting, Ø 12 - 63

## Informazioni supplementari

Important: The scope of supply does not include a connector. Please order separately.

Other piston-Ø and stroke versions available on request.

## Articolo

Denominazione	Ø pistone	Corsa (mm)	Forma costruttiva	Ø stelo pistone (mm)	Filettatura interna stelo pistone
K- 07 15 13 33	12 mm	5	4	6	M 3 x 0.5
K- 07 15 13 34	12 mm	10	4	6	M 3 x 0.5
K- 07 15 13 35	12 mm	15	4	6	M 3 x 0.5
K- 07 15 13 36	12 mm	20	4	6	M 3 x 0.5
K- 07 15 13 37	16 mm	5	4	8	M 4 x 0.7
K- 07 15 13 38	16 mm	10	4	8	M 4 x 0.7
K- 07 15 13 39	16 mm	15	4	8	M 4 x 0.7
K- 07 15 13 40	16 mm	20	4	8	M 4 x 0.7
K- 07 15 13 41	20 mm	5	5	10	M 5 x 0.8
K- 07 15 13 42	20 mm	10	5	10	M 5 x 0.8
K- 07 15 13 43	20 mm	15	5	10	M 5 x 0.8
K- 07 15 13 44	20 mm	20	5	10	M 5 x 0.8
K- 07 15 13 45	20 mm	25	5	10	M 5 x 0.8
K- 07 15 13 46	20 mm	30	5	10	M 5 x 0.8
K- 07 15 13 47	25 mm	5	5	12	M 6 x 1
K- 07 15 13 48	25 mm	10	5	12	M 6 x 1
K- 07 15 13 49	25 mm	15	5	12	M 6 x 1
K- 07 15 13 50	25 mm	20	5	12	M 6 x 1
K- 07 15 13 51	25 mm	25	5	12	M 6 x 1
K- 07 15 13 52	25 mm	30	5	12	M 6 x 1
K- 07 15 13 53	32 mm	5	6	16	M 8 x 1.25
K- 07 15 13 54	32 mm	10	6	16	M 8 x 1.25
K- 07 15 13 55	32 mm	15	6	16	M 8 x 1.25
K- 07 15 13 56	32 mm	20	6	16	M 8 x 1.25
K- 07 15 13 57	32 mm	25	6	16	M 8 x 1.25
K- 07 15 13 58	32 mm	30	6	16	M 8 x 1.25
K- 07 15 13 59	40 mm	5	6	16	M 8 x 1.25
K- 07 15 13 60	40 mm	10	6	16	M 8 x 1.25
K- 07 15 13 61	40 mm	15	6	16	M 8 x 1.25
K- 07 15 13 62	40 mm	20	6	16	M 8 x 1.25
K- 07 15 13 63	40 mm	25	6	16	M 8 x 1.25
K- 07 15 13 64	40 mm	30	6	16	M 8 x 1.25
K- 07 15 13 65	50 mm	5	6	20	M 10 x 1.5
K- 07 15 13 66	50 mm	10	6	20	M 10 x 1.5
K- 07 15 13 67	50 mm	15	6	20	M 10 x 1.5
K- 07 15 13 68	50 mm	20	6	20	M 10 x 1.5



Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.

05.06.2026

HANSA-FLEX AG

www.hansa-flex.com

1

# K-KURZH ZYL EINFACHW SER ASQ

Short-stroke cylinders, single-acting (pressureless in the retracted position), with magnet, non-cushioned, with female thread, »ASQ« Series



## Articolo

Denominazione	Ø pistone	Corsa (mm)	Forma costruttiva	Ø stelo pistone (mm)	Filettatura interna stelo pistone
K- 07 15 13 69	50 mm	25	6	20	M 10 x 1.5
K- 07 15 13 70	50 mm	30	6	20	M 10 x 1.5
K- 07 15 13 71	63 mm	5	6	20	M 10 x 1.5
K- 07 15 13 72	63 mm	10	6	20	M 10 x 1.5
K- 07 15 13 73	63 mm	15	6	20	M 10 x 1.5
K- 07 15 13 74	63 mm	20	6	20	M 10 x 1.5
K- 07 15 13 75	63 mm	25	6	20	M 10 x 1.5
K- 07 15 13 76	63 mm	30	6	20	M 10 x 1.5

## Accessori

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFEN TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug