
# K-WTEH 2-TLG PC SCHU VARIOBLOC

Service units, 2-piece with polycarbonate bowl and bowl guard

## Caratteristiche

| | |
|---|---|
| **Pressione d'ingresso** | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| **Temperatura del fluido** | max. 50 °C |
| **Temperatura ambiente** | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl) |
| **Ampiezza dei pori dell'elemento filtrante** | 40 µm |
| **Materiale di tenuta** | NBR |
| **Calotta elastica** | POM |
| **Alloggiamento** | Die-cast zinc |
| **Membrana** | NBR |
| **Contagocce** | PA |
| **Drain valve** | Manual |
| **Misurazione del valore della portata** | At P1 = 10 bar, P2 = 6 bar and pressure drop Δp = 1 bar |



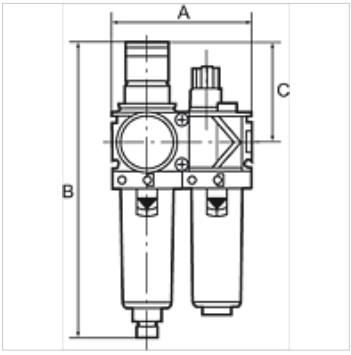


## Nota

Altri dati su richiesta.

## Descrizione

Two or three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator. Approved series in modern industrial design, with the following key benefits: Simple handling, Convenient modular assembly thanks to innovative fasteners, Excellent flow values.

## Avvertenza per l'ordinazione

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges (0.5 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Informazioni supplementari

Service units are also available with bowl guard or metal bowl. Service units are also available in other control ranges.

## Articolo

| Denominazione | Filetto | Intervallo di regolazione | Portata (L/min) | A (mm) | B | C (mm) |
|---|---|---|---|---|---|---|
| **K- 07 25 22 81** | G 1/4 | 0.5 - 10 bar | 1500 | 96,0 | 203,0 mm | 68,0 |
| **K- 07 25 22 80** | G 3/8 | 0.5 - 10 bar | 1800 | 96,0 | 203,0 mm | 68,0 |
| **K- 07 25 22 79** | G 1/2 | 0.5 - 10 bar | 3400 | 140,0 | 273,0 mm | 98,0 |
| **K- 07 25 22 78** | G 3/4 | 0.5 - 10 bar | 5000 | 140,0 | 273,0 mm | 98,0 |
| **K- 07 25 22 77** | G 1 | 0.5 - 10 bar | 5000 | 194,0 | 273,0 mm | 98,0 |

*Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.*