

K-STECKVERBINDU RED

Reducers

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +150 °C
Materiale	Ottone nichelato
Anello di compressione	Nickel-plated brass
Anello elastico	Stainless steel



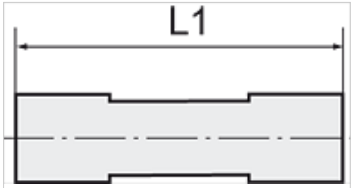

Nota

Altri dati su richiesta.

Descrizione

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Articolo

Denominazione	per diametro esterno del tubo flessibile Ø mm	L1 (mm)
K- 07 40 47 75	6 mm / 4 mm	33,0
K- 07 40 47 76	8 mm / 6 mm	39,0
K- 07 40 47 77	10 mm / 8 mm	39,5
K- 07 40 47 78	12 mm / 10 mm	41,5

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.