

K-STECKVERBINDU 1

Straight push-in connector

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +80 °C
Materiale	Ottone nichelato
Anello di compressione	Hostaform
Anello elastico	Stainless steel



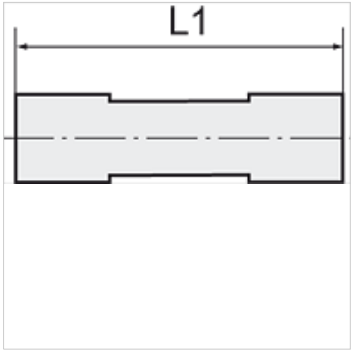

Nota

Altri dati su richiesta.

Descrizione

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	L1 (mm)
K- 07 40 25 18	M 8 x 0.75	3 mm	18,4
K- 07 40 25 19	M 11 x 1	4 mm	30,6
K- 07 40 25 20	M 14 x 1	5 mm	33,5
K- 07 40 25 21	M 13 x 1	6 mm	33,0
K- 07 40 25 22	M 15 x 1	8 mm	35,7
K- 07 40 25 23	M 17 x 1	10 mm	39,2
K- 07 40 25 24	M 20 x 1	12 mm	39,7
K- 07 40 25 25	M 24 x 1	14 mm	45,9

Nonostante il più attento esame non si possono escludere eventuali errori ed omissioni, non ci assumiamo alcuna responsabilità per le indicazioni contenute.