


K-L-STECK VERS DER AG OR

Male branch tees, angled plug connections, swivel type, parallel male thread with O-ring

HANSA FLEX

Caratteristiche

Pressione di lavoro	Max. 16 bar
Temperatura d'esercizio	-20 °C to +80 °C
Materiale	Ottone nichelato
Anello di compressione	Hostaform
O-ring	NBR
Anello elastico	Stainless steel

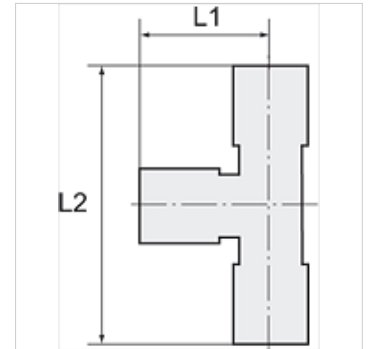

Nota

Altri dati su richiesta.

Descrizione

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Articolo

Denominazione	Filetto	per diametro esterno del tubo flessibile Ø mm	L1 (mm)	L2 (mm)	SW
K- 07 40 24 67	G 1/8	4 mm	18,6	37,7	12 mm
K- 07 40 24 68	G 1/8	6 mm	21,9	41,0	12 mm
K- 07 40 24 69	G 1/8	8 mm	25,4	44,5	12 mm
K- 07 40 24 65	G 1/4	6 mm	21,9	43,0	14 mm
K- 07 40 24 66	G 1/4	8 mm	25,4	47,5	14 mm
K- 07 40 24 64	G 1/4	10 mm	27,2	49,0	14 mm
K- 07 40 24 70	G 3/8	10 mm	27,2	54,3	17 mm
K- 07 40 24 71	G 3/8	12 mm	30,0	57,1	17 mm
K- 07 40 24 63	G 1/2	12 mm	30,0	60,7	22 mm